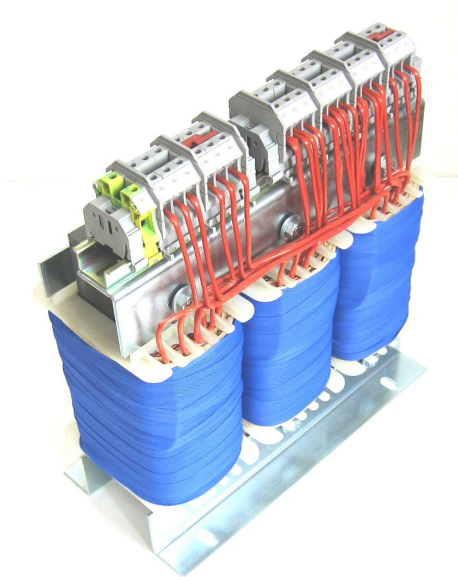

Type designation: Three phase isolating transformer 5000 VA / 3x 400 V / 3x 400 V
Type: DTTO 5000
Item number: 1009

Standard: VDE 0570 Teil 2-4, EN 61558-2-4, IEC 61558-2-4
Version: stationary
Construction: open type, varnished impregnation
Short circuit strength: non short circuit proof
Max. ambient temperature: + 40°C
Insulation class: B
Protection index: IP 00
Safety class: 1
Vector group: Dyn5
Weight approximately: 54 kg
Dimensions approximately: 370 x 385 x 155 mm (width x height x depth), crane eyes for transport
Fixing holes: 4x M8 / 264 x 125 mm
Connection input / output: Screw-type terminals

Power: 5000 VA
Input voltage: 3x 400 V
Output voltage: 3x 400 V
Output current: 3x 7,22 A
Tap output: +/- 5%
Frequency: 50-60 Hz

Application: The stationary isolating transformer guaranteed the safe galvanic isolation of the input and output sides.
Isolating transformers may be used to set up protective separation as a protective measure in accordance with VDE 0100 or to build IT-net systems.

Optional on request: Country-specific voltages, safety transformers with low voltage < 50 V, encapsulated version for protection index IP 65



Subjects to change!
Original may differ from photo!