


Type designation: Three phase isolating transformer 800 VA / 3x 400 V / 3x 400 V
 Type: DTTV 800
 Item number: 1023

Standard: VDE 0570 Teil 2-4, EN 61558-2-4
 Version: stationary
 Construction: encapsulated with high insulating polyurethane
 Short circuit strength: non inherently short circuit proof
 Protection input: Glass body fuse IEC 60127-2/3
 Max. ambient temperature: + 40°C
 Insulation class: E
 Protection index: IP 44
 Safety class: 2
 Vector group: Dyn5
 Weight: approximately 22 kg
 Dimensions approximately: 340 x 225 x 350 mm (width x height x depth)
 Fixing holes: 4x M8 / 290 x 200 mm
 Connection input: 2 m power cord with CEE plug red / 400 V / 50-60 Hz / 16 A / 5 Pole / 6 H
 Connection output: CEE socket red / 400 V / 50-60 Hz / 16 A / 5 Pole / 6 H / PE potential free

Power: 800 VA
 Input voltage: 3x 400 V
 Output voltage: 3x 400 V
 Output current: 3x 1,16 A
 Frequency: 50-60 Hz
 Test voltage: 4000 V / 50 Hz

Application: The Three phase isolating transformer guaranteed the safe galvanic isolation of the input and output sides
 Isolating transformers may be used to set up protective separation as a protective measure in accordance with VDE 0100. Only one device on each secondary winding of an isolation transformer may be connected in accordance with BGI 594.

Optional on request: Sockets USA, UK, UAE, China, France, Switzerland, Brasil, Australia, etc, country-specific voltages, connections on terminals

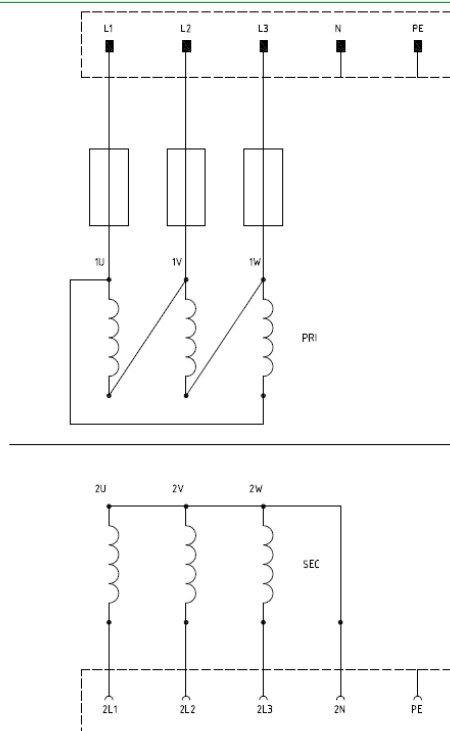

Subjects to change!