

---

Type designation: Autotransformer 2500 VA / 120 V / 127 V / 200 V / 220 V / 230 V / 240 V / 254 V  
Type: EATO 2500  
Item number: 1005

---

Standard: VDE 0570 Teil 2-13, EN 61558-2-13, IEC 61558-2-13  
Version: Autotransformer without galvanic isolation between input and output, stationary  
Construction: open type, varnished impregnation  
Short circuit strength: non short circuit proof  
Max. ambient temperature: + 40°C  
Insulation class: B  
Protection index: IP 00  
Safety class: 1  
Weight approximately: 15 kg  
Fixing holes: 4x M6 / 135 x 106 mm  
Dimensions approximately: 174 x 175 x 150 mm (width x height x depth)  
Connection input / output: Screw-type terminals

---

Power: 2500 VA  
Input voltage: 120 V / 127 V / 200 V / 220 V / 240 V / 254 V  
Output voltage: 230 V  
Output current: 10,87 A  
Frequency: 50-60 Hz


---

Application: Single-phase autotransformer without galvanic isolation between input and output for adjustment of electrical loads to country-specific voltages.  
Voltage adjustment at over- and under voltage.

---

Optional on request: Input- and output voltage, power, protection index

---

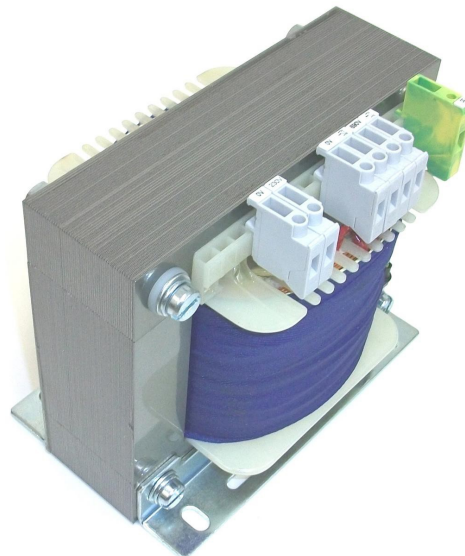

Subjects to change!  
Original may differ from photo!