

---

Type designation: Isolating transformer 400 VA / 400 V / 230 V  
Type: ETTO 400  
Item number: 1026

---

Standard: VDE 0570 Teil 2-4, EN 61558-2-4, IEC 61558-2-4  
Version: stationary  
Construction: open type, varnished impregnation  
Short circuit strength: non short circuit proof  
Max. ambient temperature: + 40°C  
Insulation class: B  
Protection index: IP 00  
Safety class: 1  
Weight approximately: 5 kg  
Fixing holes: 4x M5 / 90 x 101 mm  
Dimensions approximately: 120 x 120 x 120 mm (width x height x depth)  
Connection input / output: Screw-type terminals

---

Power: 400 VA  
Input voltage: 400 V  
Tap input: +/- 5%  
Output voltage: 230 V  
Output current: 1,74 A  
Frequency: 50-60 Hz


---

Application: The stationary isolating transformer guaranteed the safe galvanic isolation of the input and output sides  
Isolating transformers may be used to set up protective separation as a protective measure in accordance with VDE 0100.  
The ETTO series can also used as control transformers.  
Control transformers are designed for a high short time power in the supply of auxiliary circuits such as electromagnetic actuator coils, relays, contactors, etc. designed according to VDE 0113.

---

Optional on request: Customized input voltages up to 1000 V  
Output voltage for example 24 V, 42 V, 115 V, 400 V, 690 V  
Double output voltage for example 2x 115 V  
Custom connections  
Safety transformers < 50V (AC) for SELV and PELV circuits

---

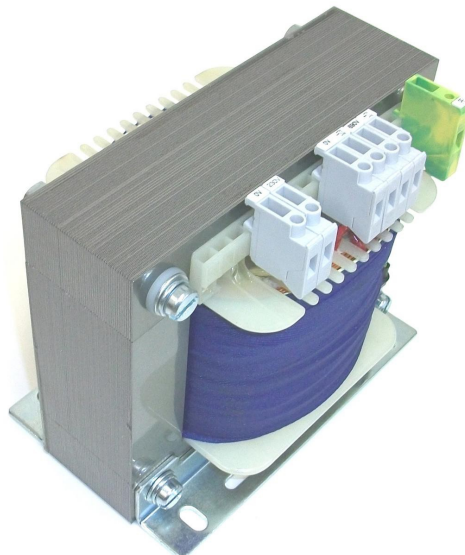

Subjects to change!  
Original may differ from photo!