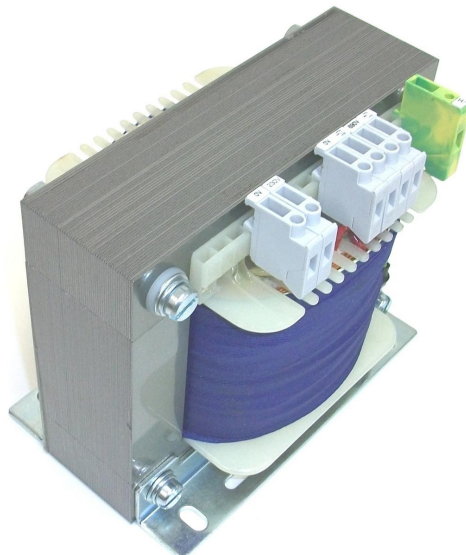

Type designation: Isolating transformer 800 VA / 400 V / 230 V
Type: ETTO 800
Item number: 1027

Standard: VDE 0570 Teil 2-4, EN 61558-2-4, IEC 61558-2-4
Version: stationary
Construction: open type, varnished impregnation
Short circuit strength: non short circuit proof
Max. ambient temperature: + 40°C
Insulation class: B
Protection index: IP 00
Safety class: 1
Weight approximately: 10 kg
Fixing holes: 4x M6 / 122 x 126 mm
Dimensions approximately: 150 x 151 x 146 mm (width x height x depth)
Connection input / output: Screw-type terminals

Power: 800 VA
Input voltage: 400 V
Tap input: +/- 5%
Output voltage: 230 V
Output current: 3,48 A
Frequency: 50-60 Hz

Application: The stationary isolating transformer guaranteed the safe galvanic isolation of the input and output sides
Isolating transformers may be used to set up protective separation as a protective measure in accordance with VDE 0100.
The ETTO series can also used as control transformers.
Control transformers are designed for a high short time power in the supply of auxiliary circuits such as electromagnetic actuator coils, relays, contactors, etc. designed according to VDE 0113.

Optional on request: Customized input voltages up to 1000 V
Output voltage for example 24 V, 42 V, 115 V, 400 V, 690 V
Double output voltage for example 2x 115 V
Custom connections
Safety transformers < 50V (AC) for SELV and PELV circuits



Subjects to change!
Original may differ from photo!