


# HEOL Spezialtransformatoren

Quality Made in Germany




Type designation: Isolating transformer 100 VA / 230 V / 230 V  
Type: ETTV 100  
Item number: 01-10100

Standard: VDE 0570 Teil 2-4, EN 61558-2-4  
Version: transportable  
Construction: encapsulated with high insulating polyurethane, carrying handle  
Short circuit strength: non inherently short circuit proof  
Max. ambient temperature: + 40°C  
Insulation class: E  
Protection index: IP 54  
Safety class: 2  
Weight: 4,2 kg  
Dimensions approx.: 130 x 155 x 180 mm (width x height x depth)  
Connection input: 2m power cord with contour plug CEE 7/17  
Connection output: SCHUKO socket, PE potential free  
Short circuit strength input: Glass body fuse IEC 60127-2/3  
Overload protection input: Fail-safe temperature switch

Power: 100 VA  
Input voltage: 230 V  
Output voltage: 230 V  
Open circuit voltage approx.: 246 V  
Output current: 0,43 A  
Frequency: 50-60 Hz  
Test voltage: 4000 V / 50 Hz

Application: The transportable isolating transformer guaranteed the safe galvanic isolation of the input and output sides  
Isolating transformers may be used to set up protective separation as a protective measure in accordance with VDE 0100. Only one device on each secondary winding of an isolation transformer may be connected in accordance with BGI 594.

Optional on request: Sockets USA, UK, UAE, China, France, Switzerland, Brasil, Australia, etc, country-specific voltages, safety transformers with low voltage < 50 V, three-phase version, CEE or low voltage sockets

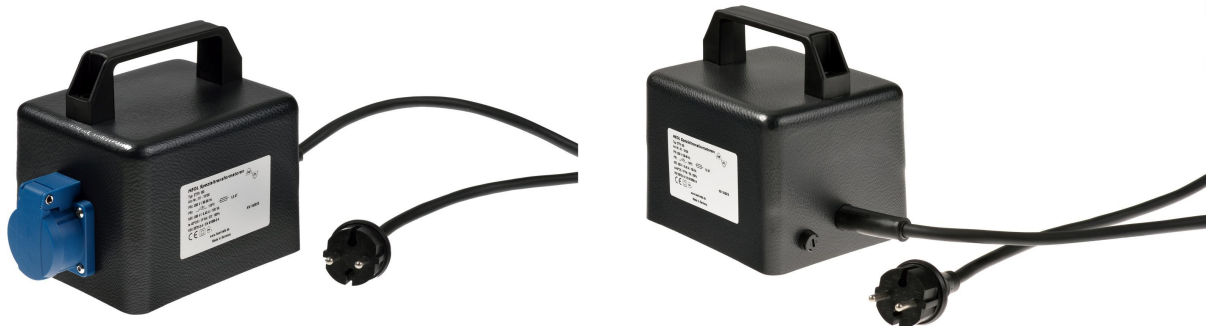

Subjects to change!